

Miller TRW & TR Series Retractable Lifelines



Specification Sheet

Materials

MATERIAL: TR Series

Housing:.....Polypropylene
 Drum:.....Aluminum
 Lifeline:.....19X7 galvanized steel
 Shaft:.....Stainless steel
 Snaphook:.....Drop forged steel
 Brake pawls:.....Bronze

MATERIAL: TRW20/20FT

Housing:.....Aluminum alloy, stainless steel
 Bushing:.....Rulon and ball & roller bearing
 Drum:.....Aluminum alloy, stainless steel
 Lifeline:.....1" polyester webbing
 Shaft:.....Aluminum alloy
 Snaphook:.....Drop forged steel
 Brake pawls:.....Stainless steel

Technical


Max Working Load:.....310 lbs – 140.62 kg
 Ultimate Strength:.....3,000 lbf. – 13.35 kN
 Lifeline Tension:.....3 to 4 lbs. – 13.3/17.8 N
 Free Fall Distance:.....24" max. – 0.61 m
 Deceleration Distance:.....42" max – 1.06 m
 Arresting Force:.....900 lbf. (approx.) – 4 kN
 Strength Test:.....300 lbf. 4' free fall
 (1.33 kN @ 1.22m free fall)

Certification:

This product meets the following standards at the time of shipment.

- * OSHA:.....1926.502
- * ANSI:.....A10.32-2004, Z359.1
- * CSA:.....Z259.2.2-98 TYPE II

All units are equipped with a fall indicator. In the event of a fall, the snap hook will indicate the unit has been subjected to fall arresting forces and should be removed from service. Options shown may vary from actual product and is subject to change without notice.

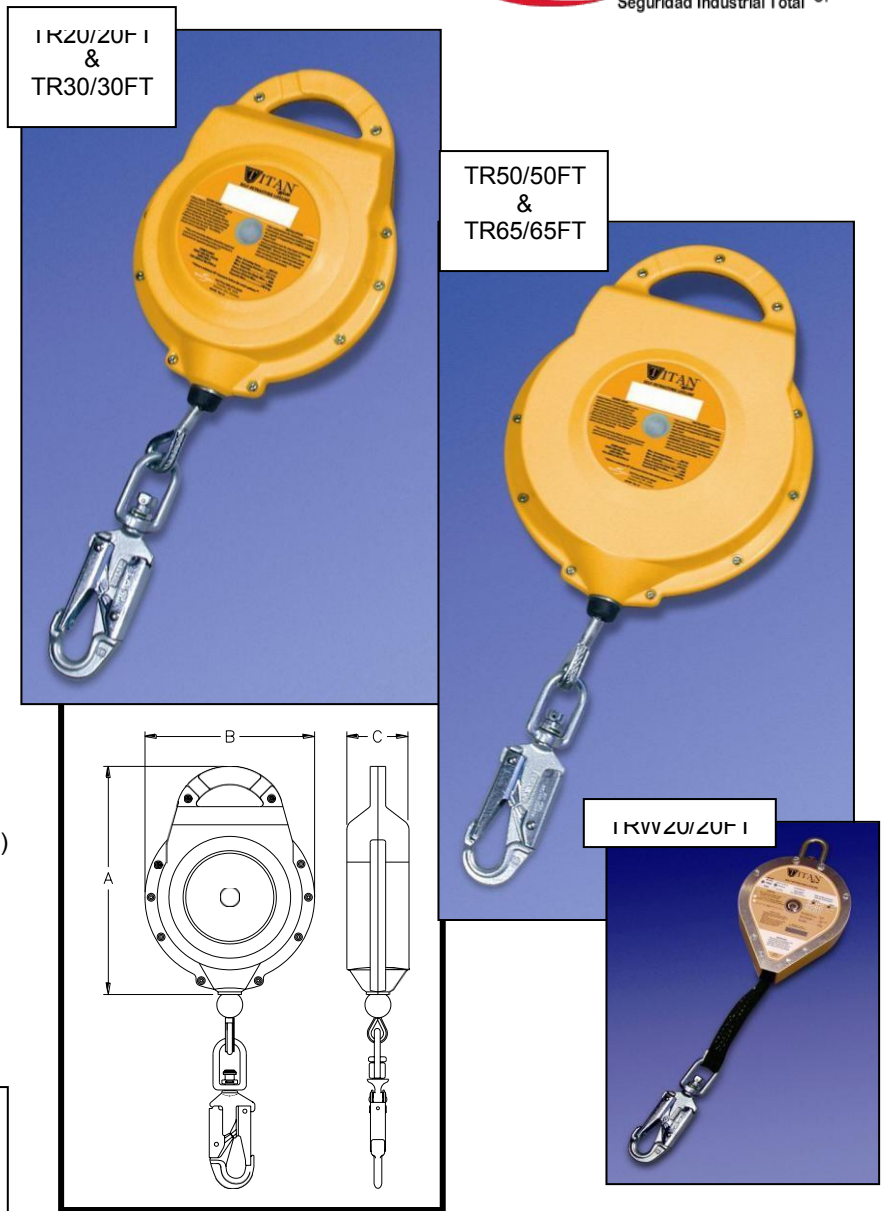

Model	Lifeline Material	Length	Weight	A	B	C
TRW20/20FT	1" Polyester Webbing	20 ft. (6m)	8 lbs.(3.6 kg)	10.50"/267mm	6.38"/162mm	2.25"/57mm
TR20/20FT	3/16" Galvanized Cable	20 ft. (6m)	11bs.(5kg)	12.75"/273mm	8.25"/210mm	3.75"/95mm
TR30/30FT	3/16" Galvanized Cable	30 ft. (9m)	13 lbs. (6.8 kg)	12.75"/273mm	8.25"/210mm	3.75"/95mm
TR50/50FT	3/16" Galvanized Cable	50 ft. (15m)	18bs.(8 kg)	12.75"/324mm	10.00"/254mm	3.75"/95mm
TR65/65FT	3/16" Galvanized Cable	65 ft. (20m)	19 lbs.(8.6 kg)	12.75"/324mm	10.00"/254mm	3.75"/95mm

PARA MAYOR INFORMACIÓN
ventas@alcacompany.com

AlcaCompanySAC LÍNEA DE EQUIPOS DE PROTECCIÓN PERSONAL
 Jr. 10 de Diciembre - Comas - Lima. Teléfono: 01 6832 816 / +51 948 535 819



by Honeywell